

Hiab Multilift XP Classic range hooklifts



Basic Data


XP22T

Technical data

Type

XP22T

Vehicle type	3 axle		
GVW of the vehicle (t)	26		
Capacity (t)	22		
G-length	51	55	61
System weight (kg) *	2460	2540	2630
Tipping angle (°)	49	49	49
Max. operating pressure (MPa)	30		
Recommended max. oil flow (l/min)	100		

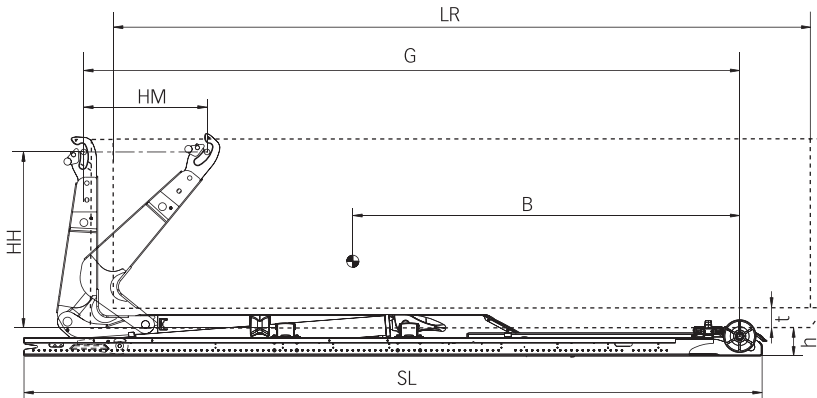


* Weight includes hydraulic body locking and excludes oil tank and oil.

** The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local Hiab Multilift dealer.

*** Other hook heights for different body standards available.

Hiab Multilift equipments meet the demands set forth in the EU Machine Directive and they can be CE marked. We reserve the rights for modifications. Illustrations do not always show an equipment in standard version.

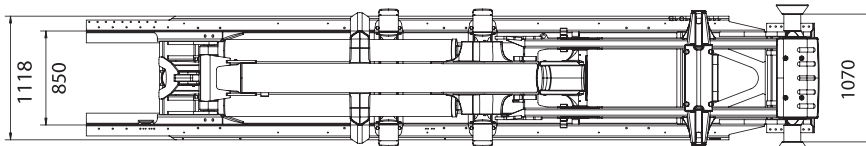

Primary dimensions

Model	XP22T.51	XP22T.55	XP22T.61
LR = Body length (m) (min – max)	4.2 - 6.1	4.7 - 6.5	5.2 - 7.1
SL = Subframe length (mm) **	5933	6283	6783
B = Centre of gravity (mm)	2900	3200	3500
G = Exact G-length (mm)	5080	5480	6080
HM = Horizontal movement (mm)	1100	1100	1100
t = Min free tunnel height (body) (mm)		125	
h = Installation height (mm)		250	
HH = Hook height (mm) ***		1570	

Cargotec improves the efficiency of cargo flows on land and at sea - wherever cargo is on the move. Cargotec's brands MacGregor, Kalmar and Hiab are recognised leaders in cargo and load handling solutions around the world. Cargotec's global network is positioned close to customers and offers extensive services that ensure the continuous, reliable and sustainable performance of equipment. www.cargotec.com



Cargotec Finland Oy
 Nesteentie 36, P.O.Box 39
 FI-21201 Raisio, Finland
 tel. +358 204 55 2399
 fax +358 204 55 2231
www.hiab.com