

JONSERED 1200RS




BASIC DATA

JONSERED1200RS BASIC DATA

Technical data	J1200RS 66	J1200RS 71	J1200RS 84	J1200RS 89
Max. lifting capacity (kNm)	110	109	105	104
Hydraulic outreach* (m)	6.61	7.11	8.36	8.86
Number of extensions	1	1	2	2
Outreach / lifting capacity, standard (m/kg)	3,0 - 3300	3,0 - 3300	3,0 - 3100	3,0 - 3100
	4,0 - 2700	4,0 - 2650	4,0 - 2550	4,0 - 2500
	5,0 - 2240	5,0 - 2220	5,0 - 2140	5,0 - 2120
	6,0 - 1860	6,0 - 1840	6,0 - 1760	6,0 - 1760
	6,5 - 1700	7,1 -1480	7,0 -1500	7,0 - 1500
			8,0 - 1300	8,0 - 1300
			8,8 - 1140	
Slewing system	Single			
Slewing angle (°)	415			
Slewing torque, gross (kNm)	21,9			
Max. working pressure (MPa) ¹⁾	26,0			
Recommended oil flow – fixed pump (l/min)	120			
Min. recommended oil flow – variable displacement pump (l/min)	160			
Weight - Double stand up platform crane with Standard stabilizer (kg)*	1960	1980	2150	2170

*Weight with fixed pump system, oil weight included

Side view

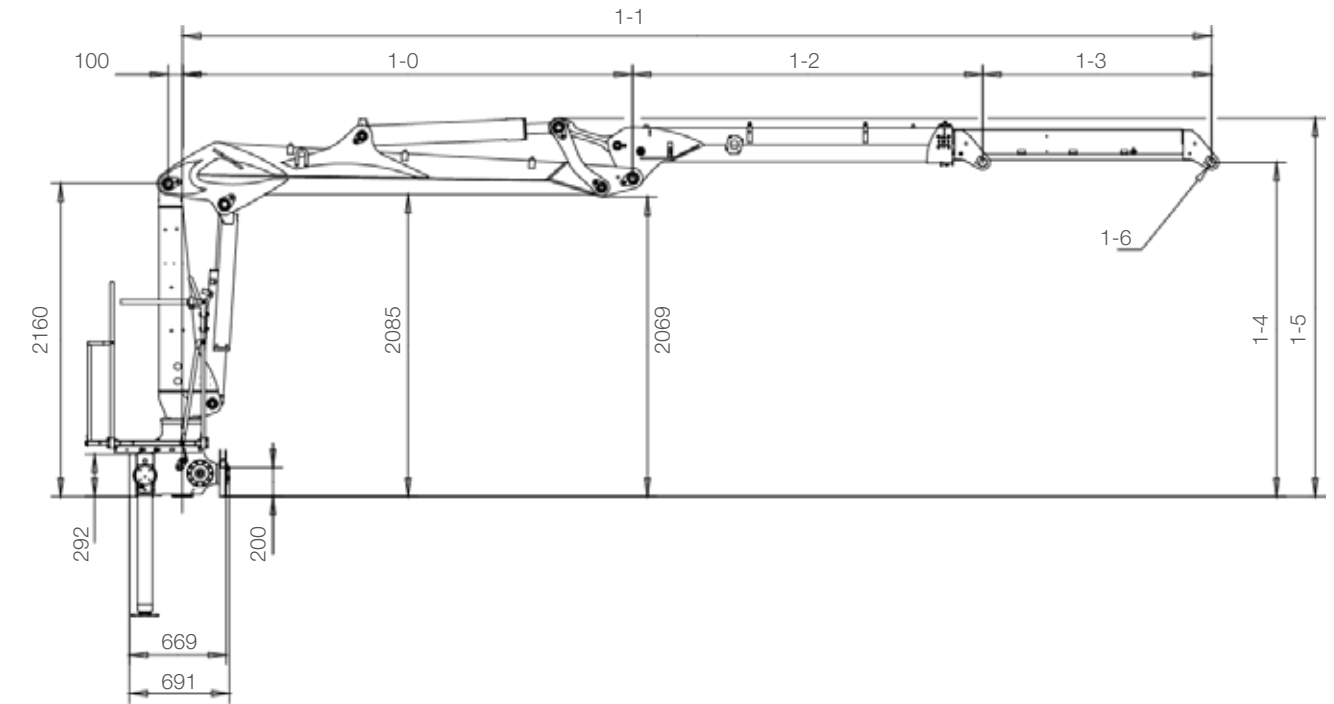

Model	1-0	1-1 min	1-1 max	1-2	1-3	1-4	1-5	1-6
66	2609	5029	6609	2420	1580	2300	2642	Ø40. B=184
71	3107	5527	7107	2420	1580	2306	2648	Ø40. B=184
84	2609	5214	8364	2605	3150	2340	2703	Ø40. B=184
89	3107	5712	8862	2605	3150	2346	2709	Ø40. B=184

For more information,
please visit us at www.hiab.com



BUILT TO PERFORM

Hiab is the world's leading provider of on-road load handling equipment. Customer satisfaction is the first priority for us. Hiab's product range includes HIAB loader cranes, JONSERED recycling and forestry cranes, LOGLIFT forestry cranes, MOFFETT truck mounted forklifts and MULTILIFT demountables, as well as DEL, WALTCO and ZEPRO tail lifts.

hiab.com

Hiab is part of Cargotec.

cargotec.com

Disclaimer. We reserve the right to make changes. Illustrations, drawings and data are not always in accordance with the latest version or standard model in production. The models in the pictures may present special equipment or colours.

