

JONSERED 1500Z



BASIC DATA


JONSERED 1500Z BASIC DATA

Technical data	J1500Z 80	J1500Z 95
Max. lifting capacity (kNm)	136	129
Hydraulic outreach* (m)	8.0	9.5
Number of extensions	1	2
Outreach - lifting capacity, standard (m - kg)	3.0 - 4100	3.0 - 3900
	4.0 - 3200	4.0 - 3000
	5.0 - 2650	5.0 - 2500
	6.0 - 2300	6.0 - 2160
	7.0 - 1960	7.0 - 1840
	7.5 - 1820	8.0 - 1580 9.0 - 1260
Slewing system	Double	
Slewing angle (°)	425	
Slewing torque, gross (kNm)	28.6	
Max. working pressure (MPa)	26	
Recommended oil flow – fixed pump (l/min), 1-pump	70-90	
Recommended oil flow – fixed pump (l/min), 2-pump	2 x 60-80	
Min. recommended oil flow – variable displacement pump (l/min)	160	
Weight - High seat crane with standard stabilizer (kg)*	2280	2450
Weight - HiVision crane with standard stabilizer (kg)**	2410	2580
Weight - Cabin crane with standard stabilizer (kg)*	2690	2860

* Weight with fixed pump system, oil weight included

** Weight with variable pump system, oil weight included

Side view

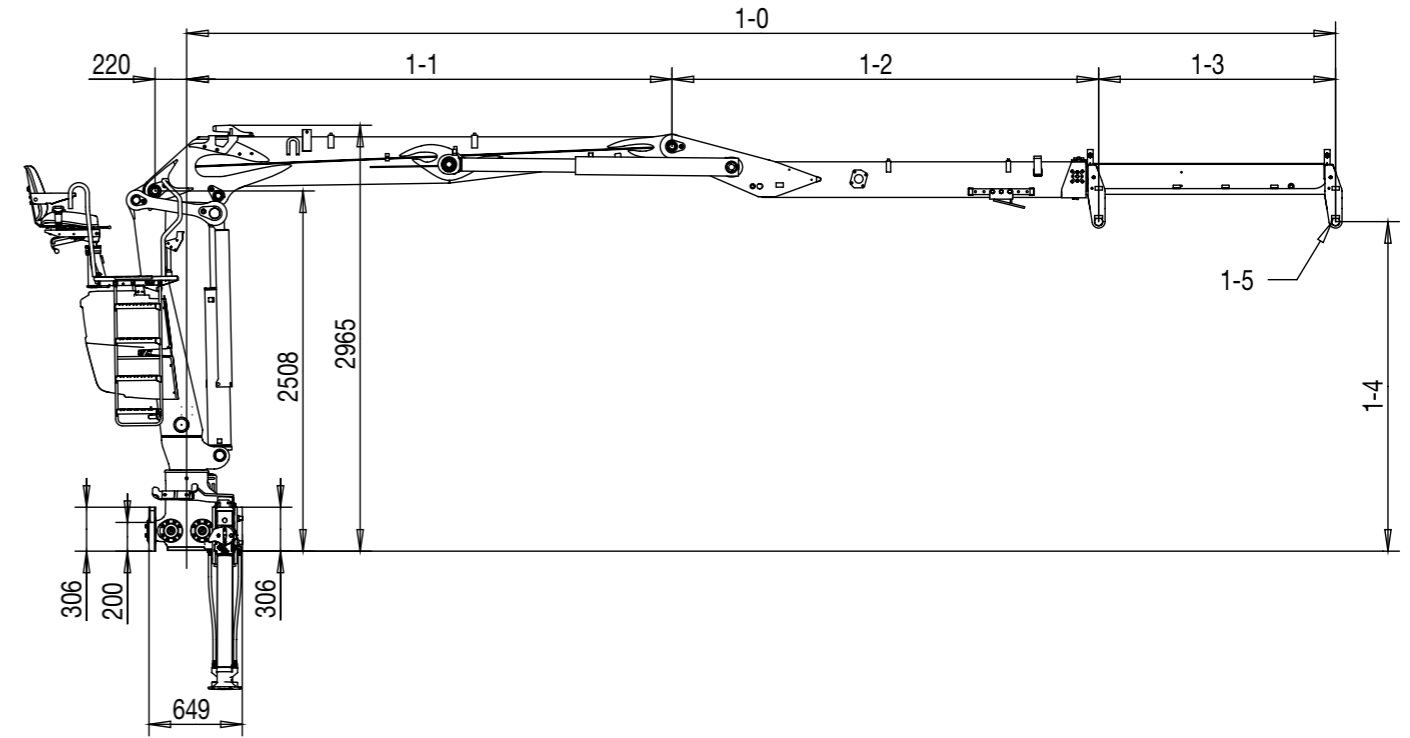

Model	1-0 min	1-0 max	1-1	1-2	1-3	1-4	1-5
80	6350	8000	3380	2970	1650	2295	Ø 40, B=184
95	6510	9470	3380	3130	2960	2235	Ø 40, B=184



For more information,
please visit us at www.hiab.com

BUILT TO PERFORM

Hiab is the world's leading provider of on-road load handling equipment. Customer satisfaction is the first priority for us. Hiab's product range includes HIAB loader cranes, JONSERED recycling and forestry cranes, LOGLIFT forestry cranes, MOFFETT truck mounted forklifts and MULTILIFT demountables, as well as DEL, WALTCO and ZEPRO tail lifts.

hiab.com

Hiab is part of Cargotec.

cargotec.com

Disclaimer. We reserve the right to make changes. Illustrations, drawings and data are not always in accordance with the latest version or standard model in production. The models in the pictures may present special equipment or colours.

BD-J1500Z-EN-WW_190207