

JONSERED 1620Z




JONSERED 1620Z BASIC DATA

Technical data	J1620Z 80	J1620Z 93
Max. lifting capacity (kNm)	158	145
Hydraulic outreach* (m)	8.0	9.3
Number of extensions	1	2
Outreach - lifting capacity, standard (m - kg)	4.0 - 3450	4.0 - 3200
	5.0 - 3000	5.0 - 2750
	6.0 - 2650	6.0 - 2460
	7.0 - 2300	7.0 - 2100
	7.7 - 2080	8.0 - 1820
	9.0 - 1480	
Slewing system	Double	
Slewing angle (°)	412	
Slewing torque, gross (kNm)	31	
Max. working pressure (MPa)	22	
Recommended oil flow – fixed pump (l/min), 1-pump	80	
Recommended oil flow – fixed pump (l/min), 2-pump	2 x 80	
Weight - High seat crane with standard stabilizer (kg)*	2645	2780

* Weight with fixed pump system, oil weight included

Side view

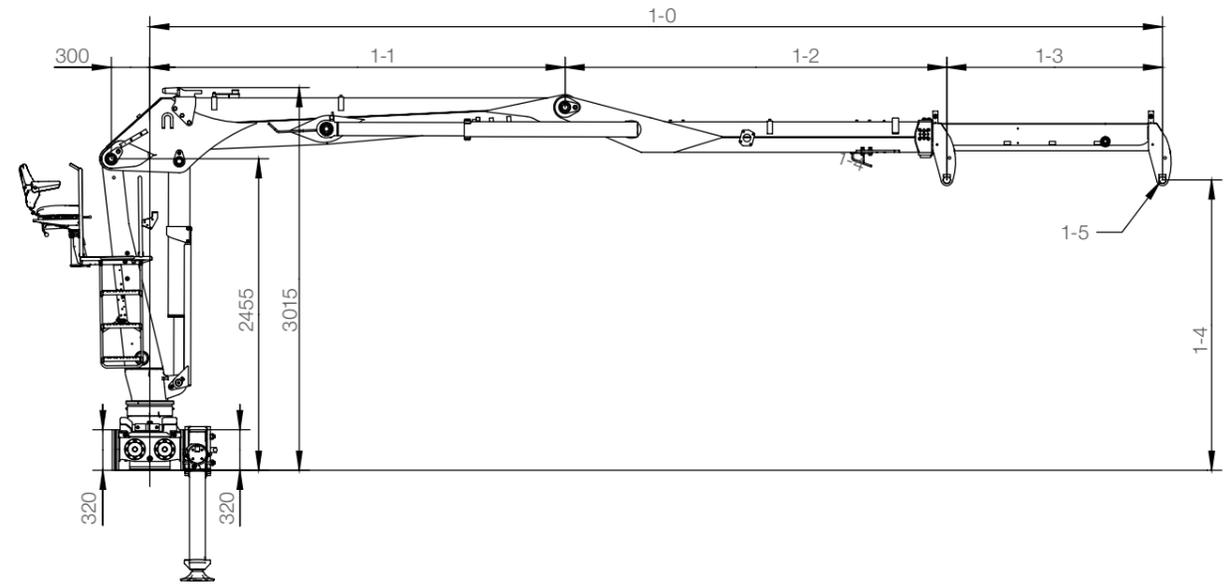

Model	1-0 min	1-0 max	1-1 max	1-2	1-3	1-4	1-5
80	6288	7988	3278	3010	1700	2288	Ø 40, B=184
93	6368	9268	3278	3090	2900	2242	Ø 40, B=184

For more information,
please visit us at www.hiab.com



BUILT TO PERFORM

Hiab is the world's leading provider of on-road load handling equipment. Customer satisfaction is the first priority for us. Hiab's product range includes HIAB loader cranes, JONSERED recycling and forestry cranes, LOGLIFT forestry cranes, MOFFETT truck mounted forklifts and MULTILIFT demountables, as well as DEL, WALTCO and ZEPRO tail lifts.

hiab.com

Hiab is part of Cargotec.

cargotec.com

Disclaimer. We reserve the right to make changes. Illustrations, drawings and data are not always in accordance with the latest version or standard model in production. The models in the pictures may present special equipment or colours.

BD-J1620Z-EN-WW_190131