

JONSERED 2640Z




JONSERED 2640Z BASIC DATA

Technical data	J2640Z 82	J2640Z 95
Max. lifting capacity (kNm)	225	216
Hydraulic outreach (m)	8.2	9.5
Number of extensions	1	2
Outreach - lifting capacity, standard (m - kg)	3.0 - 6600	3.0 - 5600
	4.0 - 5200	4.0 - 5000
	5.0 - 4400	5.0 - 4200
	6.0 - 3750	6.0 - 3600
	7.0 - 3200	7.0 - 3050
	7.7 - 2900	8.0 - 2650 9.0 - 2100
Slewing system	Double	
Slewing angle (°)	370	
Slewing torque, gross (kNm)	36.4	
Max. working pressure (MPa)	27	
Recommended oil flow – fixed pump (l/min), 1-pump	80	
Recommended oil flow – fixed pump (l/min), 2-pump	2x80	
Weight - High seat crane with standard stabilizer (kg)*	2780	2970

*) Weight with fixed pump system, oil weight included

Side view

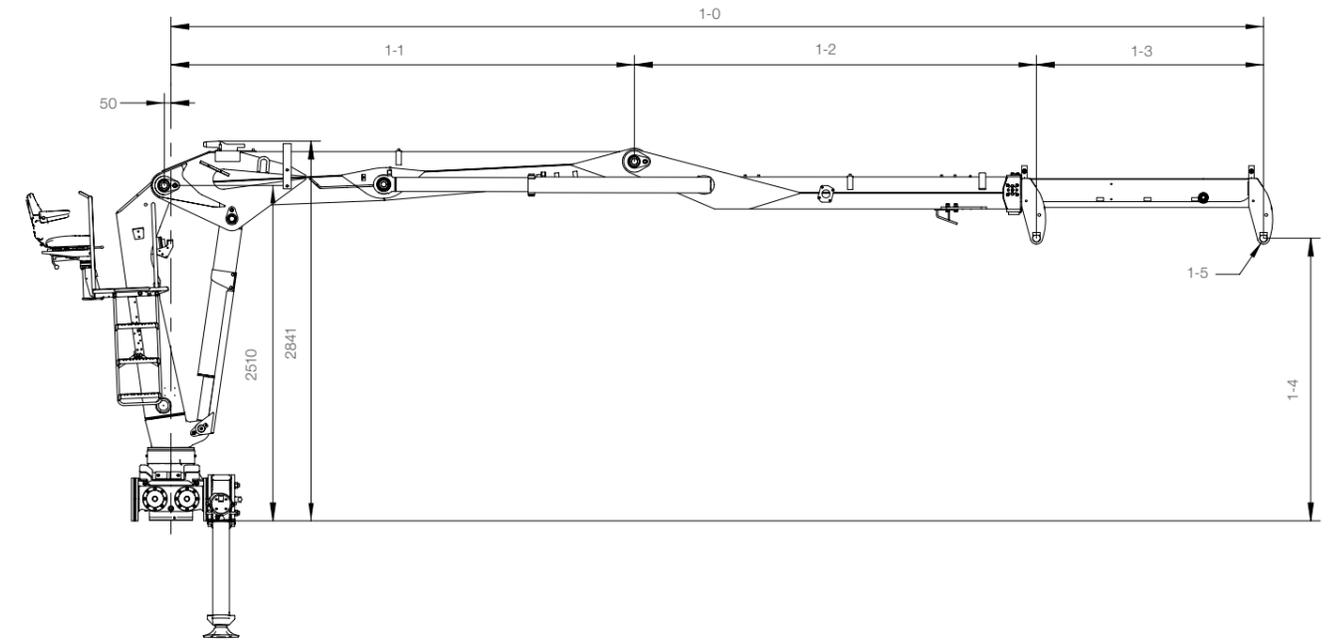

Model	1-0 min	1-0 max	1-1	1-2	1-3	1-4	1-5
82	6480	8180	3470	3010	1700	2116	Ø 40, B=184
95	6560	9460	3470	3090	2900	2074	Ø 40, B=184

For more information,
please visit us at www.hiab.com



BUILT TO PERFORM

Hiab is the world's leading provider of on-road load handling equipment. Customer satisfaction is the first priority for us. Hiab's product range includes HIAB loader cranes, JONSERED recycling and forestry cranes, LOGLIFT forestry cranes, MOFFETT truck mounted forklifts and MULTILIFT demountables, as well as DEL, WALTCO and ZEPRO tail lifts.

hiab.com

Hiab is part of Cargotec.

cargotec.com

Disclaimer. We reserve the right to make changes. Illustrations, drawings and data are not always in accordance with the latest version or standard model in production. The models in the pictures may present special equipment or colours.

BD-J2640Z-EN-EU_190208