

LOGLIFT 125S




LOGLIFT 125S BASIC DATA

Technical data	F125S 79	F125S 96	
Max. lifting capacity (kNm)	123	117	
Hydraulic outreach* (m)	7.9	9.6	
Number of extensions	1	2	
Outreach - lifting capacity, standard (m - kg)	3.0 - 3850 4.0 - 3000 5.0 - 2440 6.0 - 2060 7.0 - 1760 7.9 - 1500	3.0 - 3350 4.0 - 2800 5.0 - 2300 6.0 - 1940 7.0 - 1660 8.0 - 1440 9.0 - 1260 9.6 - 1140	
Slewing system	Double		
Slewing angle (°)	425		
ving torque, gross (kNm) 29.8			
Max. working pressure (MPa)	24		
Recommended oil flow – fixed pump (I/min), 1-pump	80		
Recommended oil flow – fixed pump (I/min), 2-pump	2x80		
Min. recommended oil flow – variable displacement pump (I/min)	160		
Weight - High seat crane with standard stabilizer (kg)*	2180	2300	
Weight - Cabin crane with standard stabilizer (kg)*	2590	2710	

^{*)} Weight with fixed pump system, oil weight included

Side view

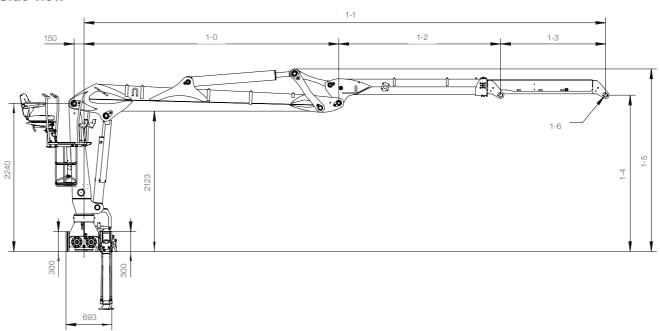

Model	1-0	1-1 min	1-1 max	1-2	1-3	1-4	1-5	1-6
79	3855	6305	7895	2450	1590	2365	2761	Ø 40, B=184
96	3855	6445	9595	2590	3150	2398	2761	Ø 40, B=184



BD-F125S-EN-WW_190131

BUILT TO PERFORM

Hiab is the world's leading provider of on-road load handling equipment. Customer satisfaction is the first priority for us. Hiab's product range includes HIAB loader cranes, JONSERED recycling and forestry cranes, LOGLIFT forestry cranes, MOFFETT truck mounted forklifts and MULTILIFT demountables, as well as DEL, WALTCO and ZEPRO tail lifts.

hiab.com

Hiab is part of Cargotec.

cargotec.com

Disclaimer. We reserve the right to make changes. Illustrations, drawings and data are not always in accordance with the latest version or standard model in production. The models in the pictures may present special equipment or colours.

