

HIAB J14S




BASIC DATA

HIAB J14S BASIC DATA

Technical data	J14S 79i		J14S 96i	
Max lifting capacity, net (lb-ft)	100308		95146	
Max outreach (ft-in)	25'11"		31'5"	
Number of extensions	1		2	
Outreach / Lifting capacity (ft-in;in/lbs)	10	9200	10	8000
	15	6400	15	6100
	20	4900	20	4650
	25	3900	25	3700
	25'11"	3600	30	3050
	-	-	31'5"	2800
Slewing system	Rack and pinion: Double			
Slewing angle (°)	425			
Slewing torque, gross (lb-ft)	23676			
Max. working pressure (psi)	3771			
Recommended oil flow – fixed pump (gal/min), 2-pump	2x21			
Weight - High seat loader with standard stabilizer (lbs) *	4806		5115	


* Weight with fixed pump system, oil weight included

Side view

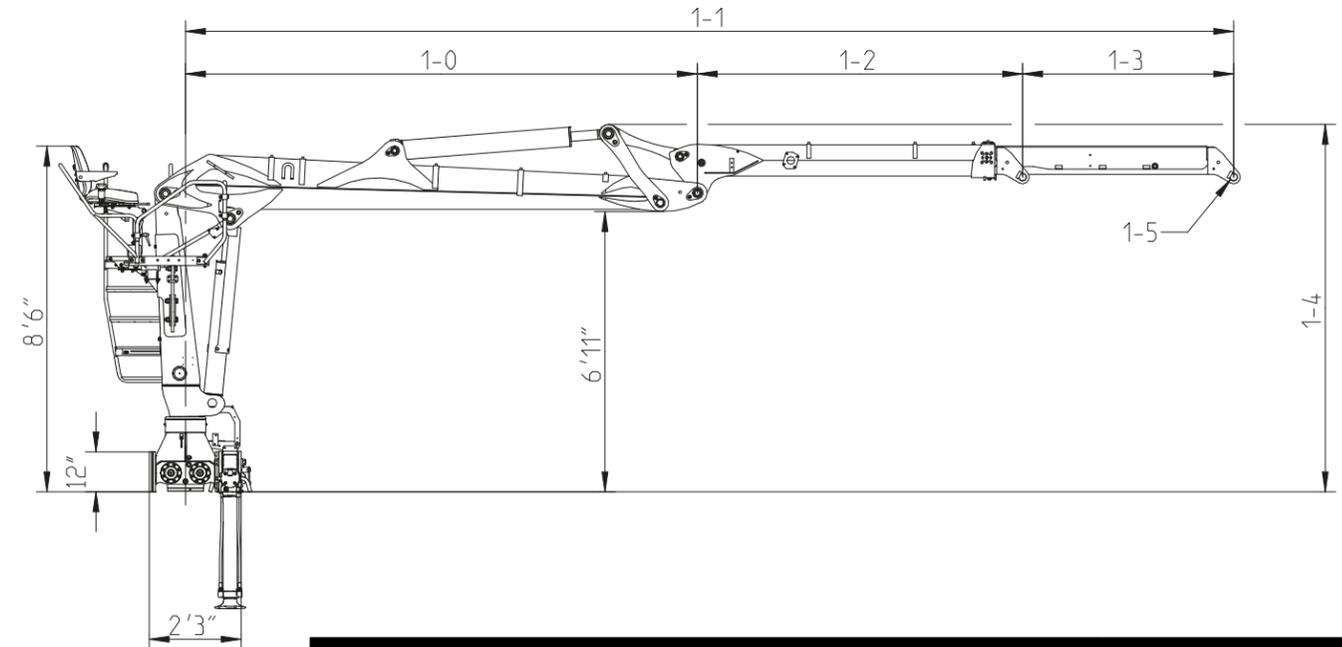


Model	1-0	1-1 min	1-1 max	1-2	1-3	1-4	1-5	HPL
79i	12'7"	20'8"	25'11"	8'1"	5'3"	9'1"	Ø 1.57", B=7.24"	X
96i	12'7"	21'2"	31'6"	8'6"	10'4"	9'1"	Ø 1.57", B=7.24"	X


Slewing radius

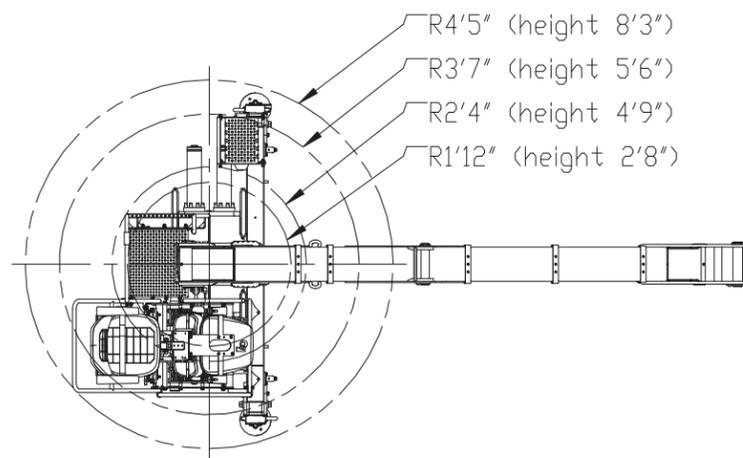

Stabilizers ET370

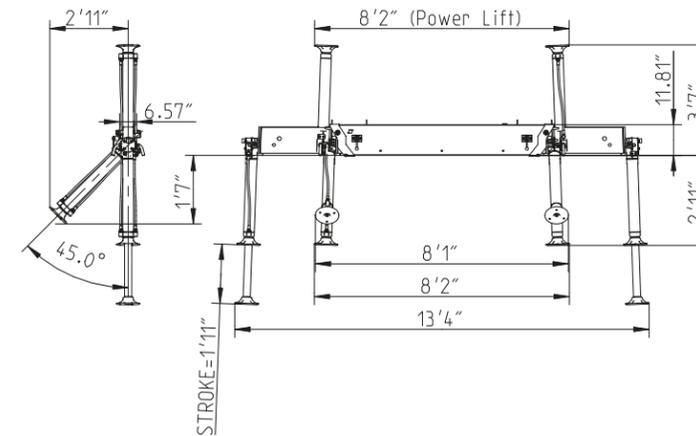

Base with stabilizers ET370

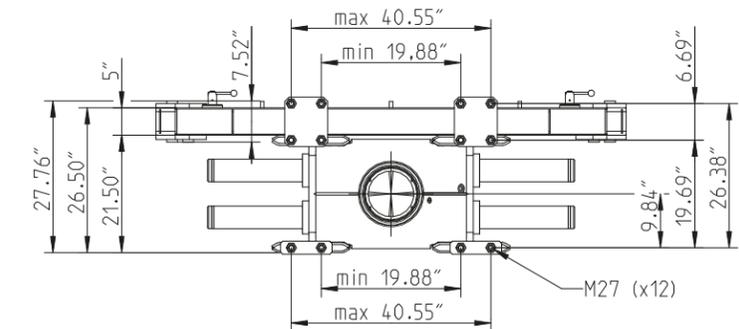


For more information, please visit us at
www.hiab.com/en-US/HIAB



OUR COMMITMENT TO YOU

Hiab is the world's leading provider of on-road load handling equipment. Customer satisfaction is the first priority for us. Hiab's product range includes HIAB loader cranes, MOFFETT truck mounted forklifts, JONSERED recycling and forestry cranes, LOGLIFT forestry cranes, and MULTILIFT demountables, as well as DEL, WALTCO, and ZEPRO tail lifts. At Hiab USA, we have invested heavily in our nationwide service and support team as part of our commitment to our customers. Our network of Hiab USA branch locations and more than one hundred factory-trained mobile service technicians provide your HIAB loader with an unrivaled coast-to-coast service network. Wherever you are, we are.

HIAB USA LOCATIONS

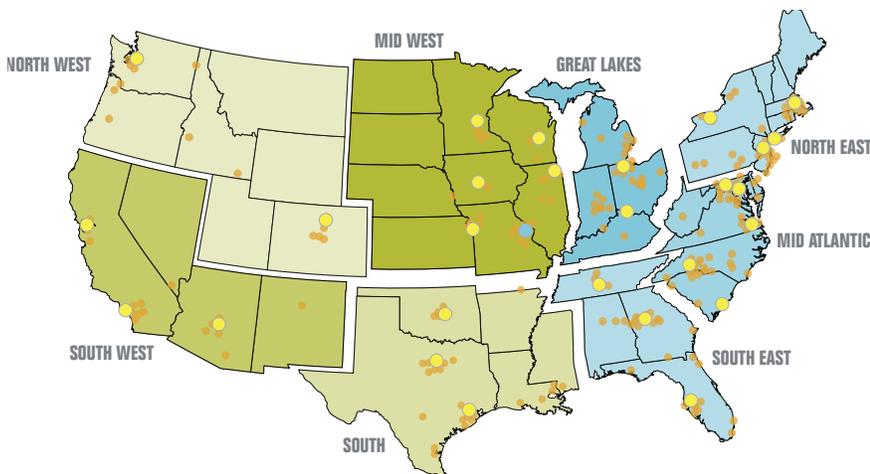

Disclaimer. Hiab loaders have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001 in fatigue class S2. Cargotec's certified Quality Assurance System complies with ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice. Hiab loaders produced for EU-countries are CE marked and comply with the European Standard EN12999.

Hiab USA Inc
12233 Williams Road
Perrysburg, OH 43551 USA
tel. +419 482 6000
fax. +419 482 6001
www.hiab.us.com

