Specification Sheet for SW Range

Company Name: _____ Date: _____

Order Number: _____ Quantity required: _____

☐ Deliver Lift ☐ Collect Lift from Del Delivery Date Required: _____

Delivery Address

Company Name: _____ Street Address: _____

Post Code: _____ City: _____

Vehicle Details

☐ Rigid ☐ Trailer **Chassis Mass:** _____

Vehicle Voltage:

☐ 12v ☐ 24v

Tip Height Measurements:

Measure the height of the top of the vehicle body to the ground, and check that the lift supplied is suitable for this height.

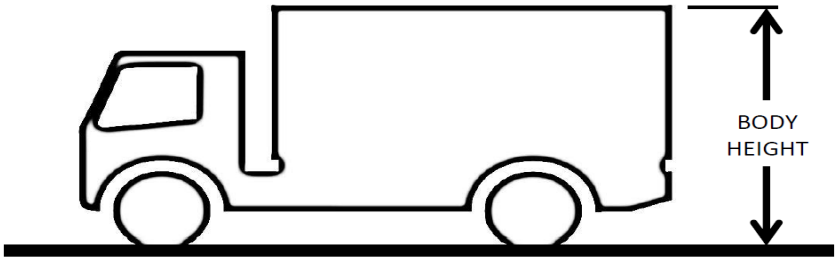

*Vehicle Body height: It is important that the maximum body height for each size lift is **not exceeded**. The Height of the body will determine the height at which the lift tynes come from the ground, if this distance is too high it may be difficult to safely position the bin over the lift tynes. If the body height is slightly lower than recommended (up to 50mm) the bin lift can be powered up to the correct height to safely pick up the bin. For this reason there is a **plus zero, minus 50mm tolerance** on the mounting height of the bin lift.

Tail Lift Details

Lift Capacity:

☐ 150kg

Drive:

☐ PTO Operated (Only Option on SW Lifts)

Tip Height/ Model Options:

☐ 2650mm (SW150-2) ☐ 3035mm (SW150-3)

Roof requirements:

****SW Lifts come with a Hydraulic Roof as standard 1000mm Wide x 1095mm Deep**

Control Setup:

☐ Fixed Control ☐ Wanderlead

Two handed control station:

☐ Yes ☐ No

Cab Warning System:

☐ None ☐ Visual ☐ Audible

Warranty:

☐ 2 Year Warranty ☐ 3 Year Warranty ☐ 4 Year Warranty ☐ 5 Year Warranty

To be completed by DEL

Part Number of Lift: _____

Price of each Lift: _____