


HLF SERIES FLIPAWAY GATE



2,500 lb., 3,000 lb., 4,000 lb., and 5,000 lb. Capacities


Waltco's HLF - (heavy duty, level ride flipaway) liftgate model. Our HLF offers simplified design and maximum performance for a variety of truck and trailer applications.

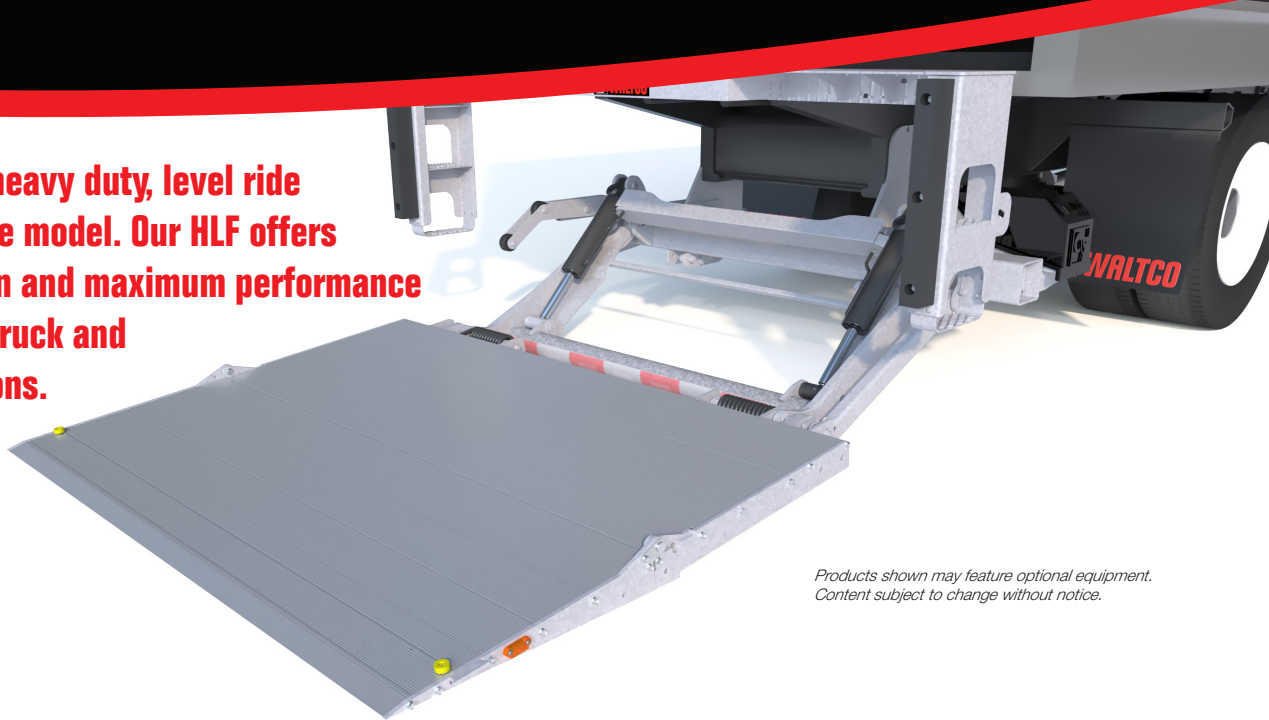

*Products shown may feature optional equipment.
Content subject to change without notice.*

STANDARD HLF SERIES ADVANTAGES INCLUDE:

- 60" x 84" Knurled aluminum platform provides large work area for handling pallet loads
- Galvanized steel components
- Faster operating speeds increase productivity
- Retracted and protected lift cylinders in the transit position
- Bolt-on ready, heavy-duty, reinforced thick bed extension
- New rocking pivot hinge minimizes digging into and damaging concrete or asphalt
- Simplified maintenance:
 - External pump for easy access
 - Grease fittings at all major hinge points
 - Nitro hardened pin with increased bearing reduces maintenance and downtime
 - Dedicated 2 gauge copper ground improves electrical component life
 - Bolt-on parting bar
- Molded & potted toggle switch
- Power down
- Bolt-on, two-step dock bumpers with 21" UHMW bumper pads
- Lock valves incorporated on lift cylinders
- Adjustable bolts to control platform pitch
- Torsion-assist platform extension

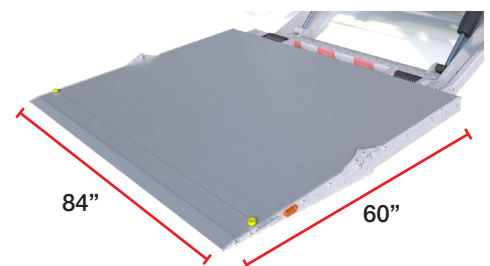

60" deep x 84" wide knurled aluminum platform with individually replaceable extrusion provides a large work area for handling pallet loads and service ability.




Industry leading, standard heavy-duty thick bed extension with reinforcing angle offers greater strength. It's bolt-on ready with adjustable two-step dock bumpers and UHMW bumper pads to protect both the dock and liftgate from rubbing damage.


HLF SERIES FLIPAWAY GATE



54" of useable platform depth with cart stops deployed.



Simplified rocking pivot hinge reduces damage to concrete or asphalt that rollers may cause.



Lift cylinders store in a retracted position behind protective plating, shielding them from road debris that causes pitting.



Optional walk ramp can be operated without moving the liftgate.

SPECIFICATIONS:

Bed Ht: 46"-60"

Model	Capacity	Platform	Ramp	Weights
HLF/AP-25	2,500 lbs.	60" x 84"	Wedge	1114 lbs.
HLF/AP-30*	3,000 lbs.	60" x 84"	Wedge	1114 lbs.
HLF/AP-40	4,000 lbs.	60" x 84"	Wedge	1352 lbs.
HLF/AP-50	5,000 lbs.	60" x 84"	Wedge	1352 lbs.

Notes: Walk Ramp / "WR" fits bed height 49" (laden) to 60"

OPTIONAL EQUIPMENT:

- Solar charging
- Wire rope step
- Auxiliary power kits for straight trucks and trailers
- Lights for dock bumpers
- Dual cart stops - 54" of useable platform depth with cart stops deployed
- Walk Ramp version of bed extension (ramp can be operated without moving the liftgate)
- Bolt-on FMVSS/CMVSS 223, 224-compliant under ride
- Hand-held Pendant Control to allow operation of the liftgate from ground or bed level
- Dual Controls for street-side or curbside operation
- Swing Door Compatible Bed Extension - this patented design allows the HLF to be mounted onto vehicles with swing doors
- Cab-mounted Power Shut-off Switch - allows operator to shut off power to liftgate control switch(es) to prevent unauthorized use
- Reinforced bed extension
- Customized options- contact factory

Waltco Lift Corp.
Corporate Office United States
 285 Northeast Ave.
 Tallmadge, OH 44278
 P: 330.633.9191
 F: 330.633.1418

Waltco Lift Corp.
United States
 620 S Hambleton Ave.
 City of Industry, CA 91744
 P: 626.964.0990
 F: 626.964.0149

Waltco Lift Inc.
Canada
 265 Export Blvd.
 Mississauga, ON L5S 1Y4
 P: 888.343.4550