

Specification Sheet for Tuckunder Range

Company Name: _____ Date: _____

Order Number: _____ Quantity required: _____

Deliver Lift Collect Lift from Del Delivery Date Required: _____

Delivery Address

Company Name: _____ Street Address: _____

Post Code: _____ City: _____

Vehicle Details


Rigid Trailer Curtainsider

Dimension A (Unladen Floor Height): _____ mm

Dimension B (Laden Floor Height): _____ mm

Dimension C (Distance from vehicle Floor to underside of the chassis): _____ mm

Dimension D (Distance from rear of Body to spring hanger): _____ mm

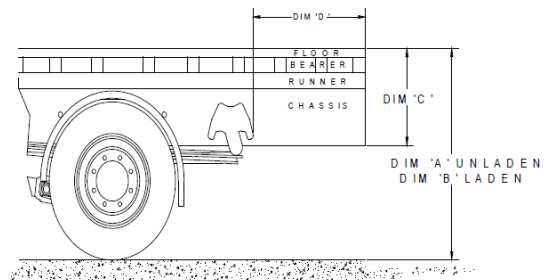

Vehicle Voltage:

12v* 24v ****12v only available on 1000kg Lift. Heavy Duty Battery required on vehicle and in some cases, Lift may have to be reduced to 750kgs lifting capacity.**

Chassis Mass: _____ Chassis Make & Model: _____

Chassis Width: _____

Suspension Type:

Steel Air

Floor Plates:

Standard Floor Plate (Primer) No Floor Plate Floor Plate to allow a Step to be fitted

Floor Plate to be sent in advance: Yes No

Please Note, if the Floor Plate is required in advance, there will be an additional carriage cost of £35.00

Tail Lift Details

Lift Options:

DA1000L (Low Bed) to suit Floor Heights on Technical Information on page 3. **(Line D)**

Platform Size = 40" (1016mm) Working surface + 8" (205mm) Ramp + Trolley Stops.

DA1500H (High Bed) to suit Floor Heights on Technical Information on page 3. **(Line G)**

Platform Size = 48" (1220mm) Working surface + 8" (205mm) Ramp + Trolley Stops.

*****All Lines on the cut line drawing, excluding Lines D & G are now obsolete*****

Control Setup:

Single External Detachable Wanderlead Internal Hard Wired Wanderlead & Fixed External Control

Tail Lift Isolator:

Cab Switch **(Not required with Detachable Wanderlead)** Red Key Isolator

Cable Options:

28' Battery Cables (Standard on DA1000) 35' Battery Cables (Standard on DA1500) 45' Battery Cables

35' Trailer Wiring 45' Trailer Wiring

Fence Type:

Pair of Drop in Fences Sockets only for Drop in Fences

Pair of Drop in Fences & Spare Sockets for Vehicle storage.

Options:

Battery Guard Flashing Lights Stow Light Indicator Service Kit

Bolt on Light Bracket Assembly

Warranty Options: **(12 month Warranty as standard)**


2 Year Warranty 3 Year Warranty 4 Year Warranty 5 Year Warranty

To be completed by DEL

Part Number of Lift: _____

Price of each Lift: _____

HIAB	TUCKUNDER RANGE	Bed Height		Platform Depth		Platform Width	Cutout Lines						Beam Position		
		MIN	MAX	No Stops	Stops		K	L	M	N	O	P	X	Y	S*
A	DA1000L MK4 22"	855	1154	1069	N/A	2006	189	702	120	100	300	50	803	499	897
B	DA1000L MK4 24"	906	1154	1159	1148	2006	199	744	120	100	300	50	803	499	1080
C	DA1000L MP 24"	906	1154	1159	1148	2006	199	744	120	100	300	50	803	499	954
D	DA1000L MP 26 3/4"	975	1190	1219	1219	2006	220	794	120	100	300	50	803	499	1080
E	DA1000H 30" MK3	1190	1440	1376	1426	2101	255	912	120	100	300	50	929	572	1146
F	DA1500L	1030	1190	1276	1326	2101	255	912	120	100	300	50	892	540	1109
G	DA1500H 30" MK4	1190	1440	1376	1426	2101	255	912	120	100	300	50	929	572	1146
H	ZR15/20-140L	1190	1260								300	50	1108	480	1196
I	ZR15/20-140H	1261	1400								300	50	979	640	1067

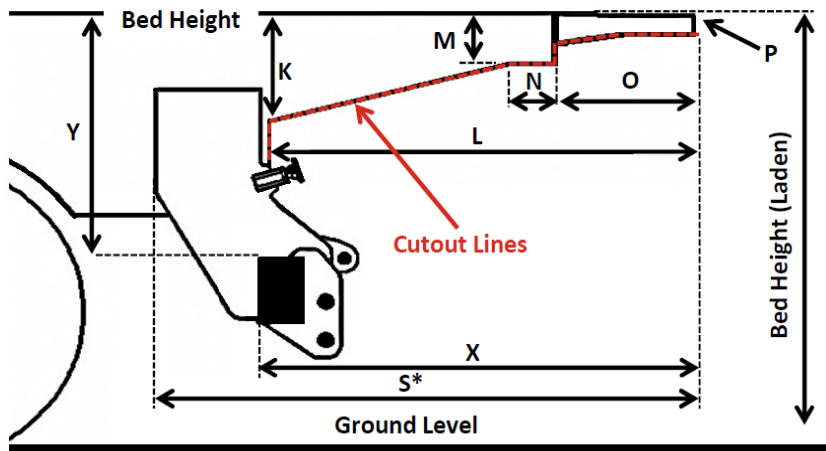

www.del-uk.com

+44 (0) 1993 708811

sales@del-uk.com

* DEL recommends a 20mm gap between the mounting plate and the spring hanger

RevG Mar 2016