

Marine Selfunloaders

Floating transfer terminal



TECHNICAL INFORMATION

Spencer Gulf

MacGregor transfer terminal

Floating offshore transfer terminal, *Spencer Gulf*, for optimising cargo transloading from port to ocean-going vessels outside Whyalla, South Australia.

In May 2005, Cargotec was awarded the contract for the supply of MacGregor bulk materials handling system for one floating offshore transfer barge (FOTB), *Spencer Gulf*, and two 10,500 dwt self-unloading barges (SUB), *Barngarla* and *Middleback*. The two self-unloading barges have an unloading capacity of 5,000 t/h each.

All three barges were built at Chinese shipyards in Shanghai. This terminal is intended for the transfer of iron ore from the port to cape-sized vessels out in the open sea. Early in 2007, they were taken into operation by CSL International for service in Whyalla in South Australia.

Fast and efficient transloading of iron ore

The floating offshore transfer terminal *Spencer Gulf* is towed out in the open sea and moored alongside an arriving cape-sized vessel. At the same time the first self-unloading barge is loaded with iron ore in port and then shuttled to the transfer terminal out in the open sea. Upon arrival, the shuttle barge is moored to the transfer terminal and the cargo is transferred from the barge, via its conveyor systems, to the transfer terminal and then loaded onto the cape-sized vessel at a capacity of 5,000 t/h. With two altering selfunloading shuttle barges, one loading ashore while the other is unloading offshore, a very

efficient transfer of the material from shore to the cape-sized vessel is achieved.


Environmental protection

Special attention was given to meet the strict Australian regulations for environmentally responsible handling of cargo between the shuttle barges and the floating offshore transfer terminal. To lower dust emission during offshore operation the conveyor systems and the shuttle boom are totally enclosed. The boom is also equipped with dust collectors. To further reduce dust during transloading spray water nozzles are installed in the discharge chutes between conveyors and in unloading points.

Special features

- High unloading rate at 5,000 t/h
- Flexibility - no shore-based unloading systems required
- Environmentally-friendly operation
- Fully automatic control of the conveyor systems
- Video camera supervision of the transloading systems on the barges



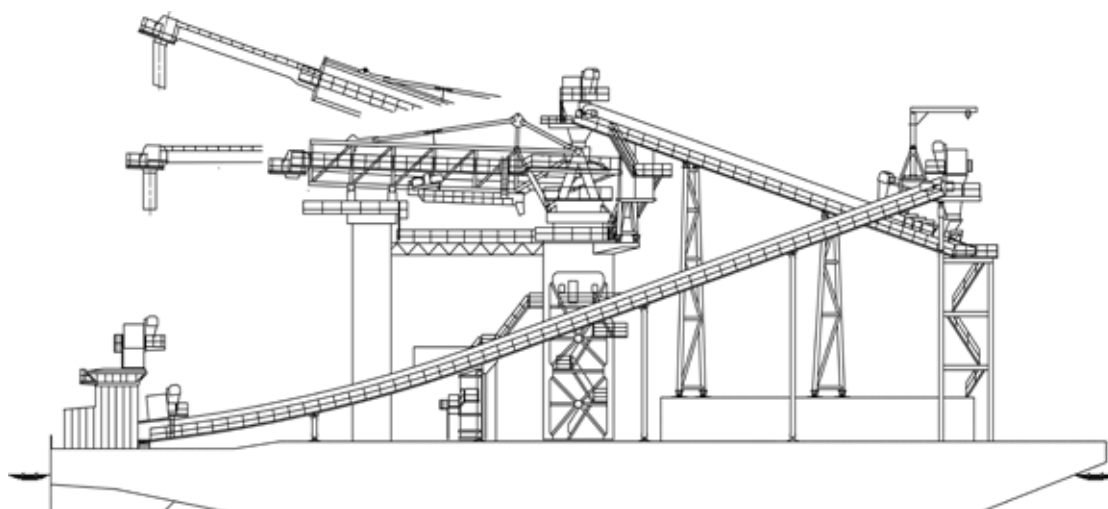

Operation of the transfer barge (FOTB) *Spencer Gulf*

The *Spencer Gulf* is a flat top barge. The cargo is transferred from the shuttle barges into the deck hopper of the transfer terminal. From there the cargo is conveyed onto two inclined belt conveyors reaching a slewing and hoisting boom conveyor midships for loading into the various cargo holds of the cape-sized vessel.

The operation and control of the transferring procedure from the shuttle barge, via the transfer terminal and further into the holds of the cape-sized vessel is remotely controlled from the control room located on the *Spencer Gulf*.

Principle dimensions of the (FOTB)

Length	96.0m
Width	27.6m
Depth	6.0m
Draught	3.2m

Design conditions

Cargo	Iron ore
Unloading capacity	5,000 t/h or 2,500 m ³ /h
Length of telescopic boom conveyor	39m



Operation of shuttle barges (SUB) *Barnagarla and Middleback*

The two shuttle barges are of flat top type, each equipped with a large deck hopper which is loaded from the ship loader located ashore. Unloading is provided by gravity flow of the material when the hydraulically operated Basket Gates are opened in the bottom and feeding to the longitudinal belt conveyor. From the longitudinal belt conveyor the cargo is fed to a slewing and hoisting boom conveyor for transfer to the receiving hopper located on *Spencer Gulf*.


The entire conveyor system is remotely controlled either from the control room on the self-unloading barges or on the offshore transfer terminal.

Barge dimensions

Dead weight	10,000 dwt
Length	117.0m
Width	27.0m
Depth	7.7m
Draught	5.8m

Design conditions

Cargo	Iron ore
Unloading capacity	5,000 t/h or 2,500 m ³ /h

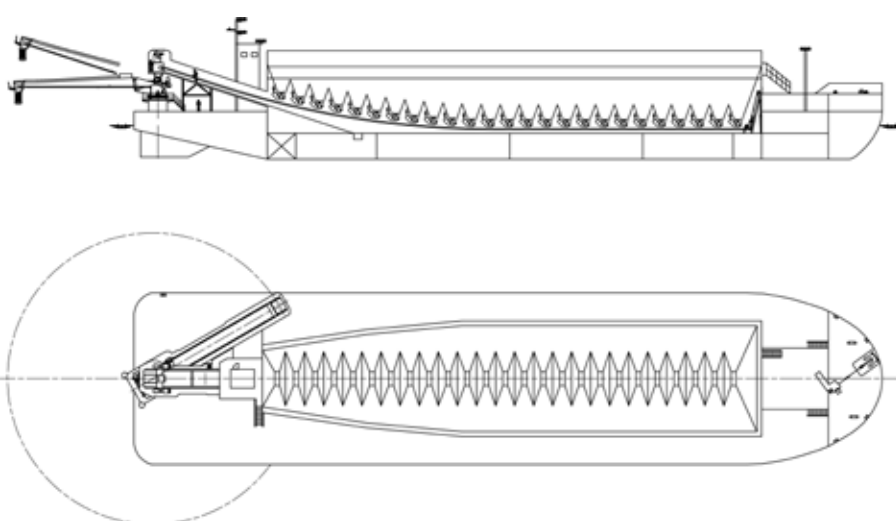

MS90050003-AUG2011



Lloyd's Register Quality Assurance certifies that the Quality Management System for Cargotec Marine is ISO 9001:2008 compliant.

Cargotec improves the efficiency of cargo flows on land and at sea – wherever cargo is on the move. Cargotec's daughter brands Hiab, Kalmar and MacGregor are recognised leaders in cargo and load handling solutions around the world.

MacGregor is the global market-leading brand in marine cargo handling and offshore load-handling solutions. Customer-driven MacGregor engineering and service solutions for the maritime transportation industry and the offshore load-handling and naval logistics markets are used onboard merchant ships, offshore support vessels, and in ports and terminals.

Published by Cargotec Corporation. Copyright © Cargotec August 2011. All rights reserved. No part of this publication may be reproduced, stored, photocopied, recorded or transmitted without permission of the copyright owner.



Cargotec Sweden AB
Marine Selfunloaders

Gesällgatan 7, P.O. Box 914
SE-745 25, Enköping, Sweden
tel. +46 (0)171 232 00
susales.enk@cargotec.com
www.cargotec.com