


MULTILIFT OPTIMA 20S



TECHNISCHE GEGEVENS

Type	OPTIMA 20S				
Voertuig type	3 axle				
Gvw truck (t)	26				
Capaciteit (t)	20				
G-lengte	46	51	53	56	59
Eigengewicht (kg) *	1775	1855	1945	1965	1995
Kiphoek (°)	50	49	52	52	53
Max. Bedrijfsdruk (MPa)	31.5				
Geadviseerde oliestroom (l/min)	80				

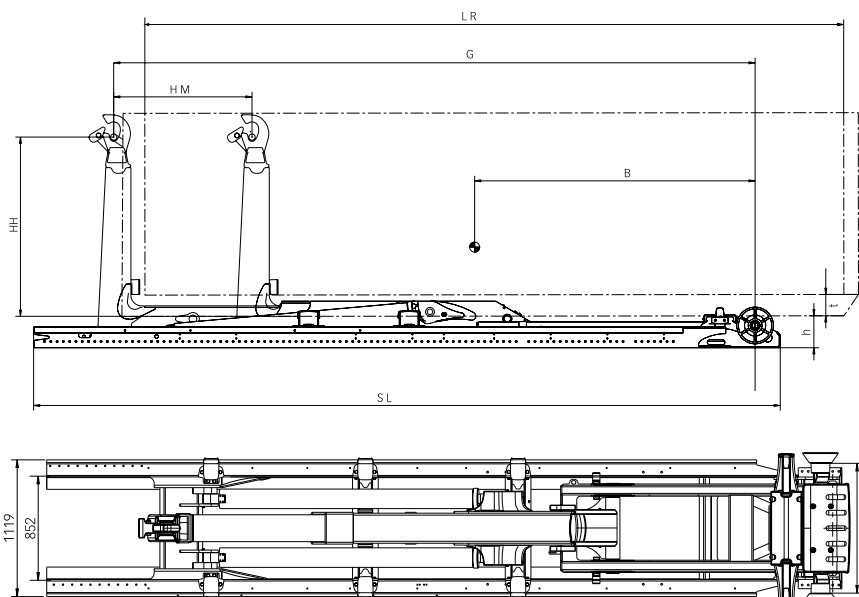

* Weight includes hydraulic body locking and excludes oil tank and oil.

** The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local MULTILIFT dealer.

Hoofdafmetingen

Model	OPTIMA 20S.46	OPTIMA 20S.51	OPTIMA 20S.53	OPTIMA 20S.56	OPTIMA 20S.59
LR = Container lengte min - max (m)	4,0 – 5,6	4,3 – 6,1	4,5 – 6,4	4,5 – 6,6	4,7 – 7,0
SL = Hulpframe lengte (mm) **	5308	5758	6508	6508	6508
B = Zwaartepunt (mm)	2450	2700	2850	2950	3000
G = Exacte g-lengte (mm)	4600	5100	5380	5580	5880
HM = Schuifweg (mm)	900	1100	1100	1300	1450
h = Installatie (rol) hoogte (mm)	230				250
t = Min. Vrije tunnel hoogte (container) (mm)	125				
HH = Haak hoogte (mm)	1570				

Sales contact

Cargotec Netherlands B.V.
Hesselingen 42
Postbus 1086, 7940 KB,
Meppel
Tel. +31 522 253 831
Fax +31 522 260 983
www.hiab.nl