


MULTILIFT OPTIMA⁺



TECHNICAL INFORMATION

Technical data

Type	OPTIMA+				
Vehicle type	3 axle				
GVW of the vehicle (t)	26				
Capacity (t)	20				
G-length	46	51	53	56	59
System weight (kg) *	1775	1855	1945	1965	1995
Tipping angle (°)	50	49	52	52	53
Max. operating pressure (MPa)	31.5				
Recommended oil flow (l/min)	80				

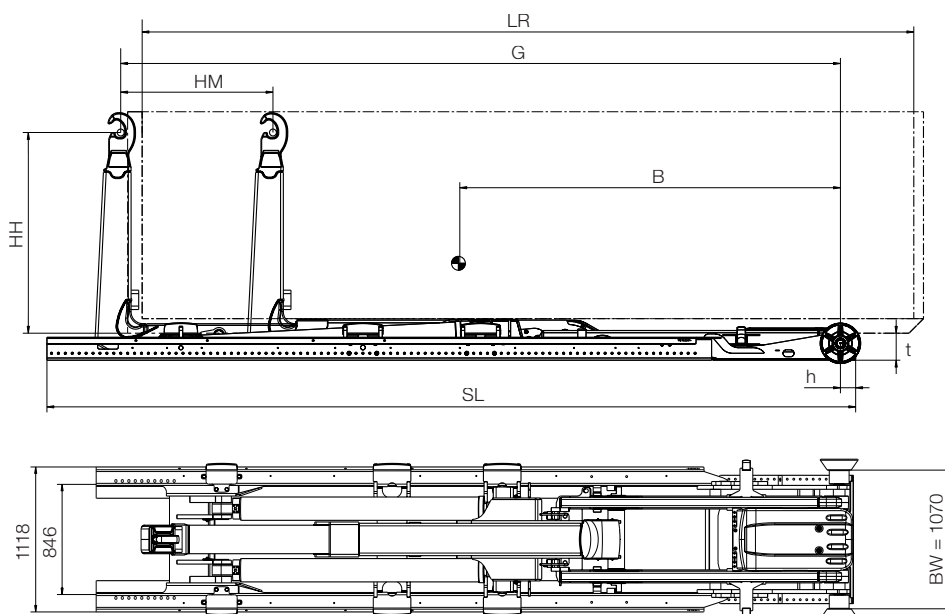

* Weight includes hydraulic body locking and excludes oil tank and oil.

** The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local MULTILIFT dealer.

Primary dimensions

Model	OPTIMA+ 46	OPTIMA+ 51	OPTIMA+ 53	OPTIMA+ 56	OPTIMA+ 59
LR = Body length (min – max) internal (m)	4.0 – 5.6	4.3 – 6.1	4.5 – 6.4	4.5 – 6.6	4.7 – 7.0
SL = Subframe length (mm) **	5308	5758	6508	6508	6508
B = Centre of gravity (mm)	2450	2700	2850	2950	3000
G = Exact G-length (mm)	4600	5100	5380	5580	5880
HM = Horizontal movement (mm)	900	1100	1100	1300	1450
h = Installation height (mm)	230				250
t = Min. Free tunnel height (body) (mm)	125				
HH = Hook height (mm)	1425				

Optima+ is only available in France, therefore these specifications are applicable for the French market.



MULTILIFT

www.multilift.com

Sales contact

Cargotec Finland Oy
Nesteentie 36, P.O.Box 39
FI-21201 Raisio, Finland
tel. +358 204 55 2399
fax +358 204 55 2231
www.hiab.com