



LOGLIFT

LOGLIFT 165Z




BASIC DATA

LOGLIFT 165Z BASIC DATA

Technical data	F165Z 80	F165Z 93
Max. lifting capacity (kNm)	158	145
Hydraulic outreach* (m)	8.0	9.3
Number of extensions	1	2
Outreach - lifting capacity, standard (m - kg)	4.0 - 3450	4.0 - 3200
	5.0 - 3000	5.0 - 2750
	6.0 - 2650	6.0 - 2460
	7.0 - 2300	7.0 - 2100
	7.7 - 2080	8.0 - 1820
Slewing system	Double	
Slewing angle (°)	412	
Slewing torque, gross (kNm)	31	
Max. working pressure (MPa)	22	
Recommended oil flow – fixed pump (l/min), 1-pump	80	
Recommended oil flow – fixed pump (l/min), 2-pump	2 x 80	
Weight - High seat crane with standard stabilizer (kg)*	2645	2780

* Weight with fixed pump system, oil weight included

Side view

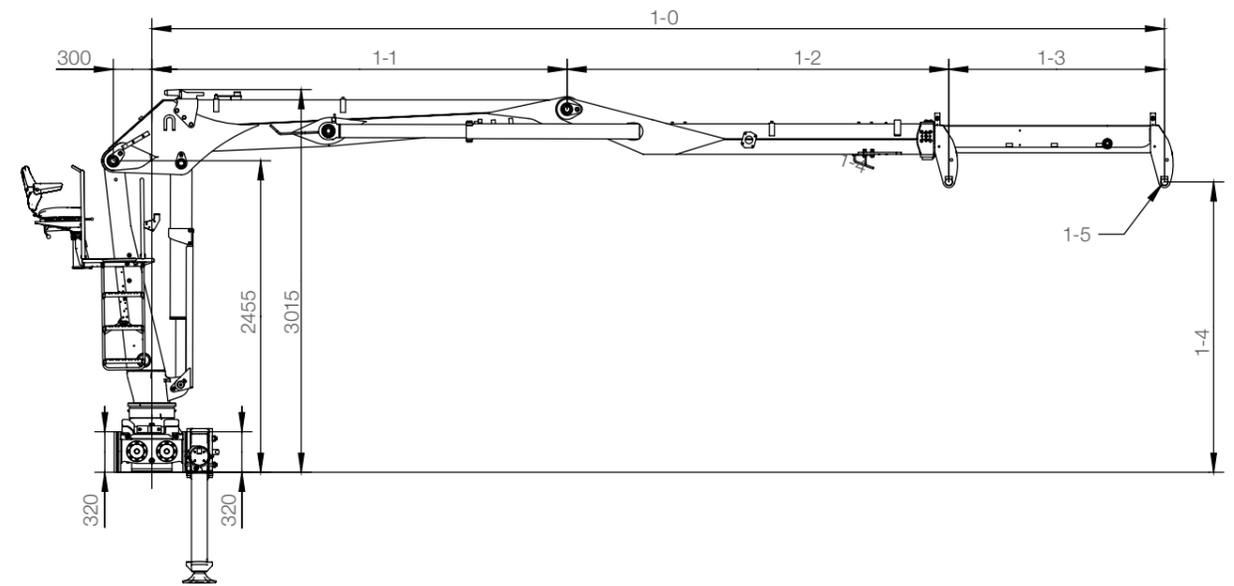

Model	1-0 min	1-0 max	1-1	1-2	1-3	1-4	1-5
80	6288	7988	3278	3010	1700	2288	Ø 40, B=184
93	6368	9268	3278	3090	2900	2242	Ø 40, B=184

For more information,
please visit us at www.hiab.com



BUILT TO PERFORM

Hiab is the world's leading provider of on-road load handling equipment, intelligent services, smart and connected solutions. Hiab's class-leading load handling equipment includes HIAB, EFFER and ARGOS loader cranes, LOGLIFT and JONSERED forestry and recycling cranes, MOFFETT and PRINCETON truck mounted forklifts, MULTILIFT skiploaders and hooklifts, and tail lifts under the ZEPRO, DEL, and WALTICO brands. As the industry pioneer and with a proud 75 year history, Hiab is committed to be the preferred partner and solution provider to its customers and shape the future of intelligent load handling.

www.hiab.com

Hiab is part of Cargotec Corporation.

www.cargotec.com

Disclaimer. We reserve the right to make changes. Illustrations, drawings and data are not always in accordance with the latest version or standard model in production. The models in the pictures may present special equipment or colours.

www.hiab.com

