

JONSERED 1250RZ




BASIC DATA

JONSERED 1250RZ BASIC DATA

Technical data	1250RZ 79	1250RZ 80	1250RZ 93
Max. lifting capacity (kNm)	106	110	103
Outreach, hydraulic extensions (m)	7.9	8.0	9.3
Number of extensions	2	1	2
Outreach / lifting capacity (m/kg)	3.0 - 3200	3.0 - 3350	3.0 - 3150
	4.0 - 2550	4.0 - 2600	4.0 - 2460
	5.0 - 2140	5.0 - 2180	5.0 - 2040
	6.0 - 1800	6.0 - 1880	6.0 - 1760
	7.0 - 1510	7.0 - 1600	7.0 - 1500
	7.5 - 1400	7.7 - 1440	8.0 - 1300 9.0 - 970
Slewing system	Double		
Slewing angle (°)	425		
Slewing torque, gross (kNm)	28.6		
Max. working pressure (MPa)	25		
Recommended oil flow – fixed pump (l/min max)	120		
Min recommended oil flow - Variable displacement pump (l/min)	160		
Weight - High Seat crane with Standard stabilizer (kg)*	2250	2180	2320

*Weight with fixed pump system, oil weight included

Side view

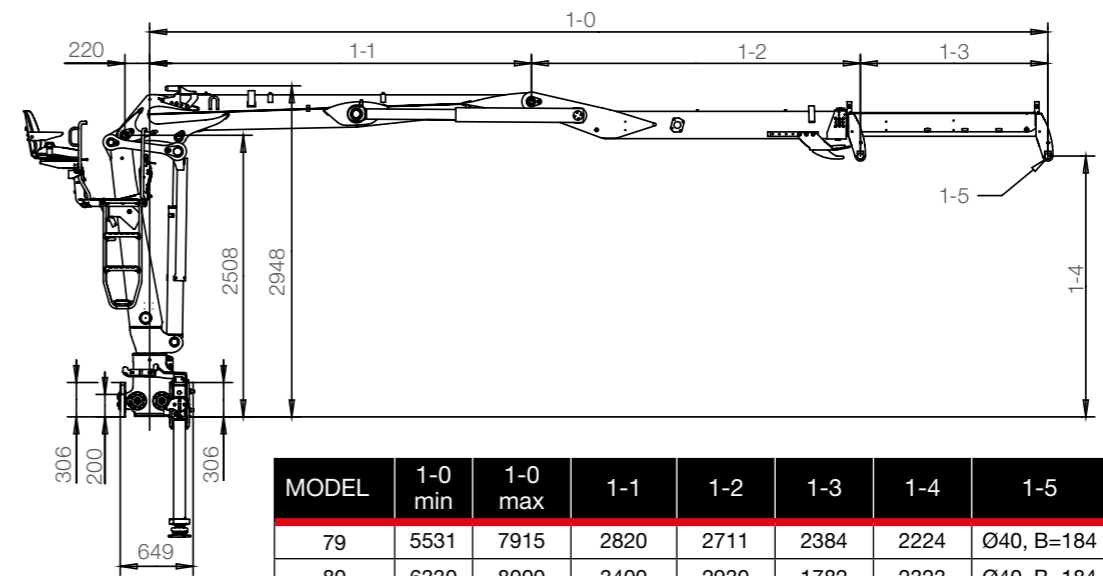

MODEL	1-0 min	1-0 max	1-1	1-2	1-3	1-4	1-5
79	5531	7915	2820	2711	2384	2224	Ø40, B=184
80	6330	8000	3400	2930	1782	2323	Ø40, B=184
93	6450	9250	3400	3050	2800	2249	Ø40, B=184

For more information,
please visit us at www.hiab.com



BUILT TO PERFORM

Hiab is the world's leading provider of on-road load handling equipment. Customer satisfaction is the first priority for us. Hiab's product range includes HIAB loader cranes, JONSERED recycling and forestry cranes, LOGLIFT forestry cranes, MOFFETT truck mounted forklifts and MULTILIFT demountables, as well as DEL, WALTCO and ZEPRO tail lifts.

hiab.com

Hiab is part of Cargotec.

cargotec.com

Disclaimer. We reserve the right to make changes. Illustrations, drawings and data are not always in accordance with the latest version or standard model in production. The models in the pictures may present special equipment or colours.

www.hiab.com

