

JONSERED 1620RZ




BASIC DATA

JONSERED 1620RZ BASIC DATA

Technical data	1620RZ 78	J1620RZ 80	J1620RZ 93
Max. lifting capacity (kNm)	153	155	146
Hydraulic outreach* (m)	7.8	8.0	9.3
Number of extensions	2	1	2
Outreach / lifting capacity (m/kg)	3.0 - 4050	3.0 - 4000	3.0 - 3750
	4.0 - 3450	4.0 - 3300	4.0 - 3100
	5.0 - 3050	5.0 - 2900	5.0 - 2700
	6.0 - 2600	6.0 - 2600	6.0 - 2440
	7.0 - 2200	7.0 - 2250	7.0 - 2120
	7.6 - 1840	7.8 - 2000	8.0 - 1840 9.0 - 1620
Slewing system	Double		
Slewing angle (°)	412		
Nominal slewing torque (kNm)	31.1		
Max. working pressure (MPa)	22		
Recommended oil flow – fixed pump (l/min), 1-pump	120		
Recommended oil flow – fixed pump (l/min), 2-pump	70-80		
Recommended oil flow – variable displacement pump (l/min)	160		
Weight - High seat crane with standard stabilizer (kg)*	2660	2560	2760

* Weight with fixed pump system, oil weight included

Side view

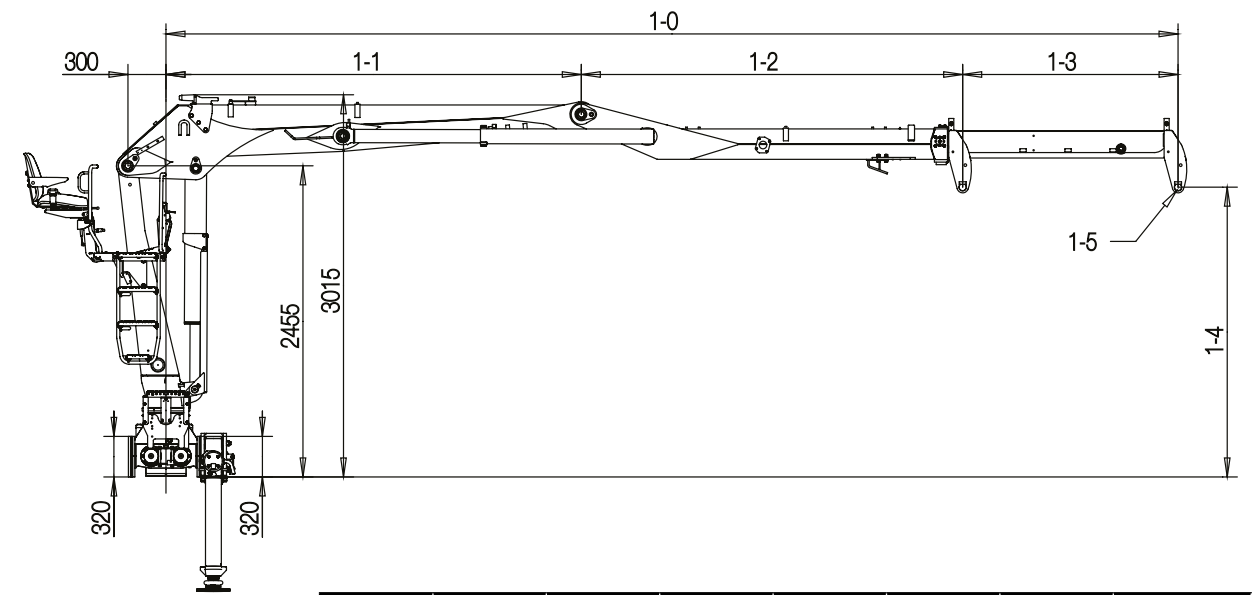

Model	1-0 min	1-0 max	1-1	1-2	1-3	1-4	1-5
78	5493	7843	2800	2693	2350	2215	Ø40, B=184
80	6288	7988	3278	3010	1700	2288	Ø40, B=184
93	6368	9268	3278	3090	2900	2242	Ø40, B=184

For more information,
please visit us at www.hiab.com



BUILT TO PERFORM

Hiab is the world's leading provider of on-road load handling equipment. Customer satisfaction is the first priority for us. Hiab's product range includes HIAB loader cranes, JONSERED recycling and forestry cranes, LOGLIFT forestry cranes, MOFFETT truck mounted forklifts and MULTILIFT demountables, as well as DEL, WALTCO and ZEPRO tail lifts.

hiab.com

Hiab is part of Cargotec.

cargotec.com

Disclaimer. We reserve the right to make changes. Illustrations, drawings and data are not always in accordance with the latest version or standard model in production. The models in the pictures may present special equipment or colours.

www.hiab.com

