

Hiab XS 166 CLX

Capacity 17 tm





Hiab XS 166 CLX Basic data

Technical data

	B-1 CLX	B-2 CLX	B-3 CLX	E-4 CLX	E-5 CLX
Max. lifting capacity (kNm)	164	156	150	143	141
Outreach - hydraulic extensions (m)	6.3	8.4	10.6	12.8	15.1
Outreach - manual extensions (m)	12.8	12.8	12.8	17.4	17.4
Outreach / Lifting capacity, standard (m / kg)	2.2 / 7000*	2.2 / 6900*	2.2 / 6800*	2.2 / 6500*	2.2 / 6300*
	3.0 / 5500	3.0 / 5300	3.1 / 4900	2.6 / 5600	2.6 / 5400
	4.4 / 3800	4.4 / 3500	4.5 / 3400	4.6 / 3200	4.8 / 3000
	6.1 / 2700	6.2 / 2500	6.3 / 2300	6.4 / 2200	6.6 / 2000
	-	8.1 / 1900	8.2 / 1760	8.4 / 1600	8.5 / 1500
	-	-	10.3 / 1380	10.4 / 1260	10.6 / 1140
	-	-	-	12.6 / 1020	12.8 / 920
	-	-	-	-	15.0 / 760
Slewing angle	406°	406°	406°	406°	406°
Height in folded position (mm)	2208	2208	2208	2232	2276
Width in folded position (mm)	2500	2500	2500	2500	2500
Installation space needed (mm)	953	953	966	953	963
Weight - "standard" crane without stabilizers (kg)	1630	1760	1880	2110	2220
Weight - stabilizer equipment (kg)	255 - 387	255 - 387	255 - 387	255 - 387	255 - 387

* Standard hook used with heavy lift hook attachment (optional)

Hiab XS 166 B-3 CLX

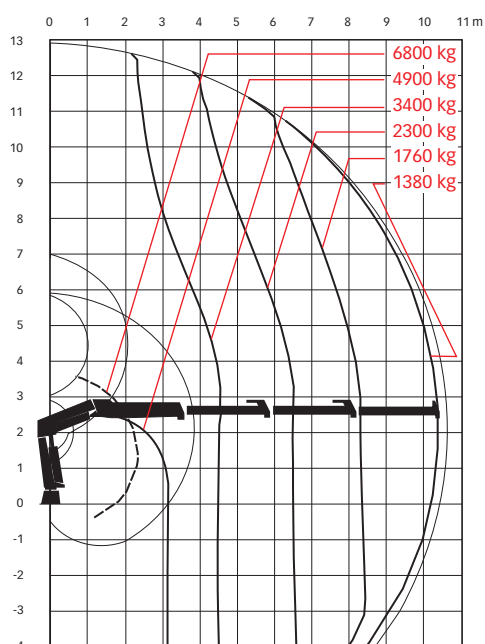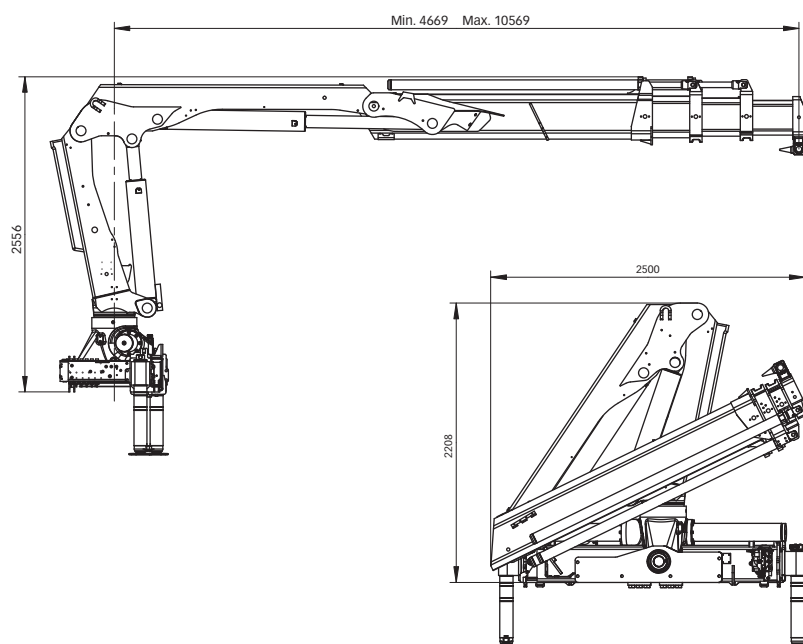

Disclaimer. Hiab cranes have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001 in fatigue class S2. Cargotec's certified Quality Assurance System complies with ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice. Hiab cranes produced for EU-countries are CE-marked and comply with the European Standard EN 12999.

Cargotec improves the efficiency of cargo flows by offering solutions for the loading and unloading of goods on land and at sea – wherever cargo is on the move. Cargotec's main daughter brands for cargo handling Hiab, Kalmar and MacGregor are global market leaders in their fields. www.cargotec.com